Smart Temp™ Australia
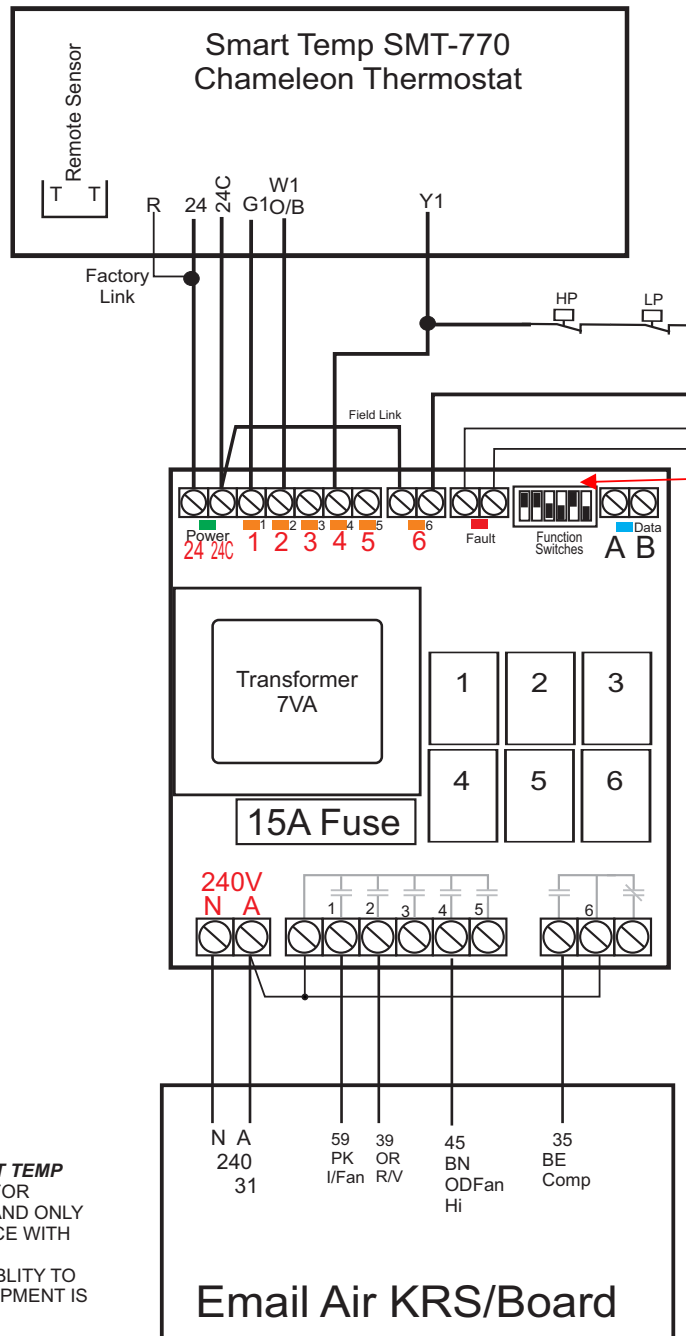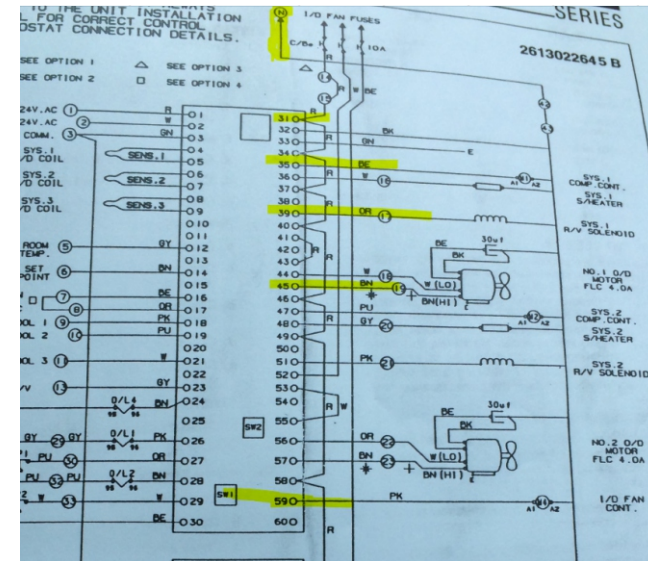
Smart Temp SMT-770
Chameleon

SW 1= OFF
SW 2 = ON
SW 3 = OFF
SW 4 = ON
Sw 5 = OFF
Sw 6 = Customer Preference
SW 7 = Off
Sw8 = Customer Preference

Smart Temp SMT-770 Chameleon Thermostat

Remote Sensor

T T

R 24 24C W1 G1 O/B Y1

Factory Link

HP LP

Field Link

DFT-880 Defrost Module

🟢 Green LED

🔴 Red LED

A N Relay Com NC NO

A
N 240V

Power 24 24C 1 2 3 4 5 6 Fault Function Switches ■Data A B

SW 3,4 & 6 ON

Transformer 7VA

1	2	3
4	5	6

15A Fuse

240V
N A

1 2 3 4 5   6

N A
240
31

59
PK
I/Fan

39
OR
R/V

45
BN
ODFan
Hi

35
BE
Comp

Email Air KRS/Board

SERIES
2613022645 B

ALL CARE AND DILIGENCE HAS BEEN TAKEN IN THE PREPARATION OF THIS INTERFACE DIAGRAM. **SMART TEMP AUSTRALIA PTY LTD** WILL ONLY BE RESPONSIBLE FOR DAMAGE CAUSED TO THE SMART TEMP PRODUCT, AND ONLY IF IT HAD BEEN CORRECTLY APPLIED IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS.
IT IS THE DEALER / CONTRACTORS SOLE RESPONSIBLITY TO ENSURE CORRECT OPERATION OF THE MAJOR EQUIPMENT IS MAINTAINED.

Installation Drawing

Drawing Revision History

15-08-2024	**REV 1.5**	**By: John K**

Drawing Name
SMT-770 Chameleon with Smart Pak6+ and DFT-880 replacing Emailair KRS Board - Single Stage

All care has been taken in the preparation of this drawing however Smart Temp Australia accept no responsibility for damage that may be caused by using this information. This is a guide only.

Unit 20, 1488 Ferntree Gully Road Knoxfield Vic 3180   Ph:(03) 9763 0094   www.thermostat.com.au