




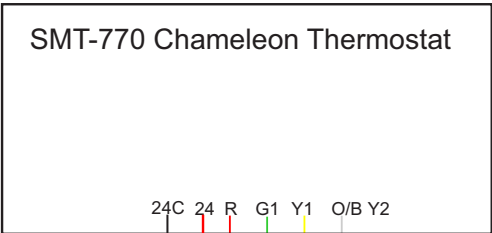


Smart Temp
SPSM
Two wire Sender Module





- SW 1= OFF
- SW 2 = ON
- SW 3 = ON
- SW 4 = ON
- Sw 5 = OFF
- Sw 6 = Customer Preference
- SW 7 = Off
- Sw8 = Customer Preference

Relay
Receiver
Module

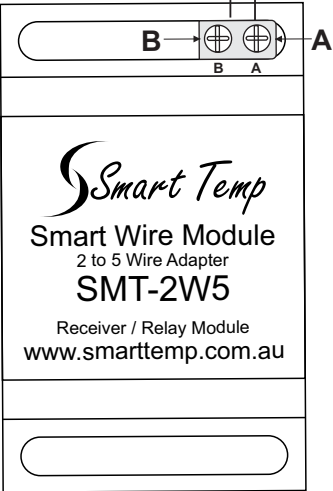

Sender module Typical Colour Codes

Mark	Colour	Typical Function
1	Green	G - Fan
2	Yellow	Y1 - 1st Stage Cool
3	White	W1 - 1st Stage Heat or Reversing Valve
4	Purple	Y2 - 2nd Stage Cool
5	Brown	W2 - 2nd Stage Heat or Aux / Emergency Heat
24R	Red	24 VOLT (HOT)
24C	Black	24 VOLT (COMMON)

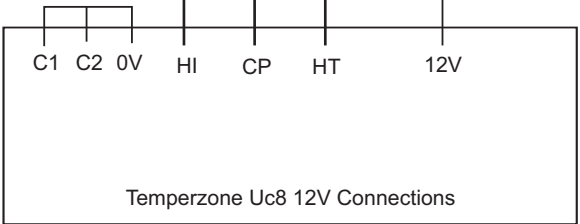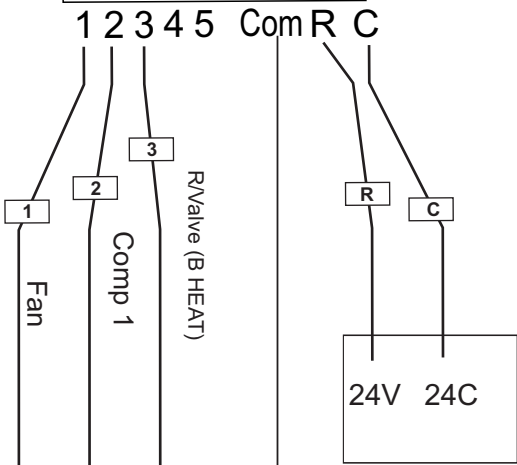

Installation Drawing

Drawing Revision History		Drawing Name
		SMT-770 wired to a Uc8 Temperzone using an SMT-2W5 2 wire Interface
15-05-2026	John K	All care has been taken in the preparation of this drawing however Smart Temp Australia accept no responsibility for damage that may be caused by using this information. This is a guide only.

U20, 1488 Ferntree Gully rd Knoxfield Vic 3180
Ph: (03) 9763 0094
WWW.thermostat.com.au