Smart Temp™ Australia

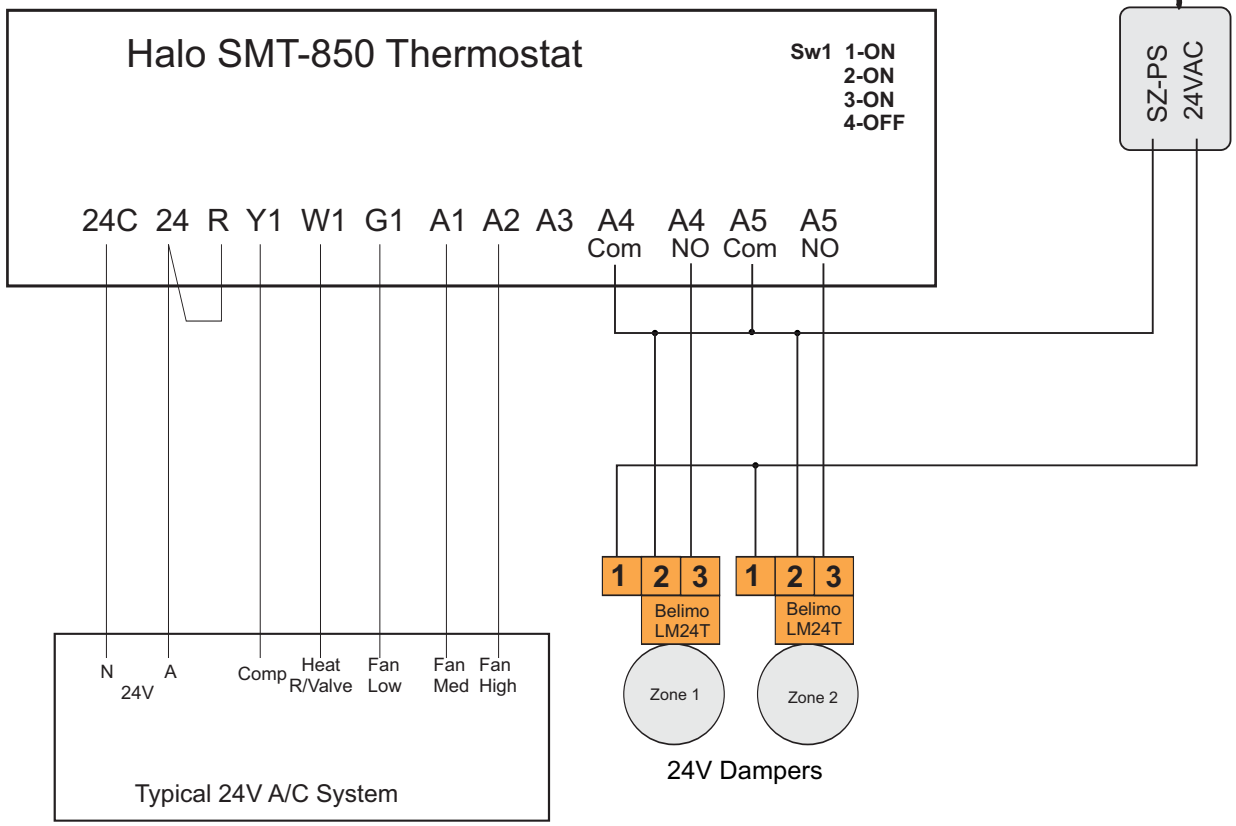

Halo Terminals

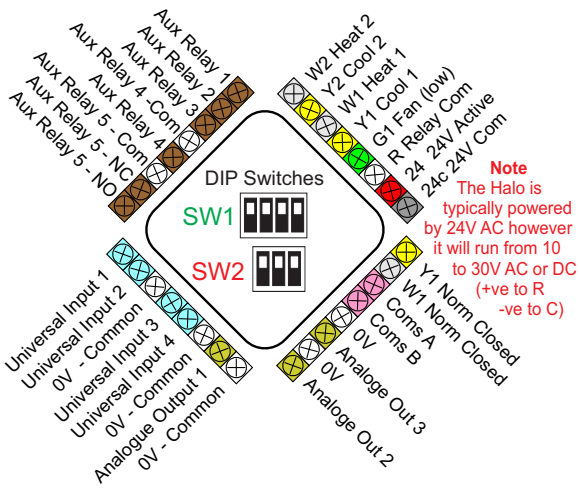

Note
The Halo is typically powered by 24V AC however it will run from 10 to 30V AC or DC (+ve to R -ve to C)

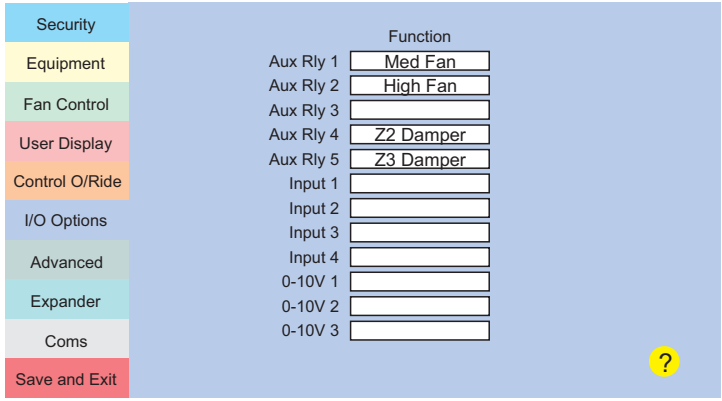

Installer Menu I/O Options - Default Pin is 0021

For 2 zones Set AUX4 to Z2 Damper and AUX 5 to Z3 Damper

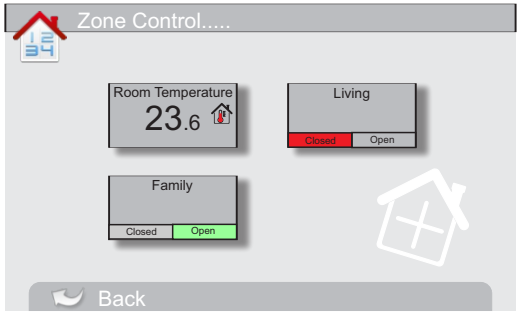

Suggest renaming default Z1 to Room Temperature
(Press and hold Zone icon to rename)

ALL CARE AND DILIGENCE HAS BEEN TAKEN IN THE PREPARATION OF THIS INTERFACE DIAGRAM. ***SMART TEMP AUSTRALIA PTY LTD*** WILL ONLY BE RESPONSIBLE FOR DAMAGE CAUSED TO THE SMART TEMP PRODUCT, AND ONLY IF IT HAD BEEN CORRECTLY APPLIED IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS.

Smart Temp™ Australia

Installation Drawing

Drawing Revision History		
13-08-2025	REV 2.0	By: John K

Drawing Name
Smart Temp Halo wired to a Typical 24V A/C System 3 Fan Speed with 2 Zones

All care has been taken in the preparation of this drawing however Smart Temp Australia accept no responsibility for damage that may be caused by using this information. This is a guide only.

Unit 20, 1488 Ferntree Gully Road Knoxfield Vic 3180
Ph:(03) 9763 0094 www.thermostat.com.au