

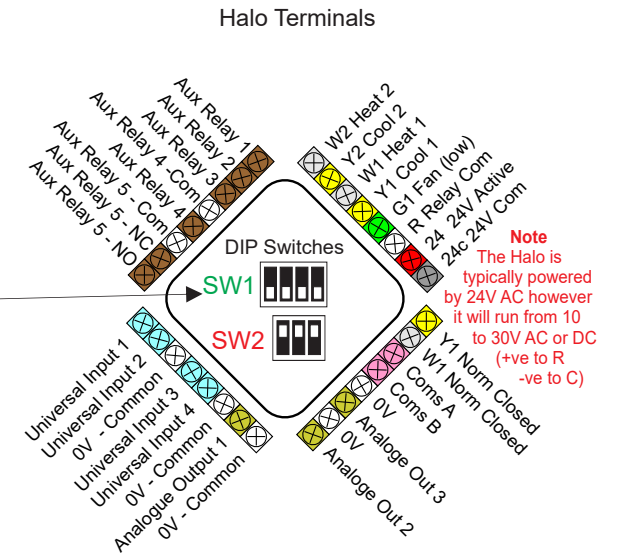


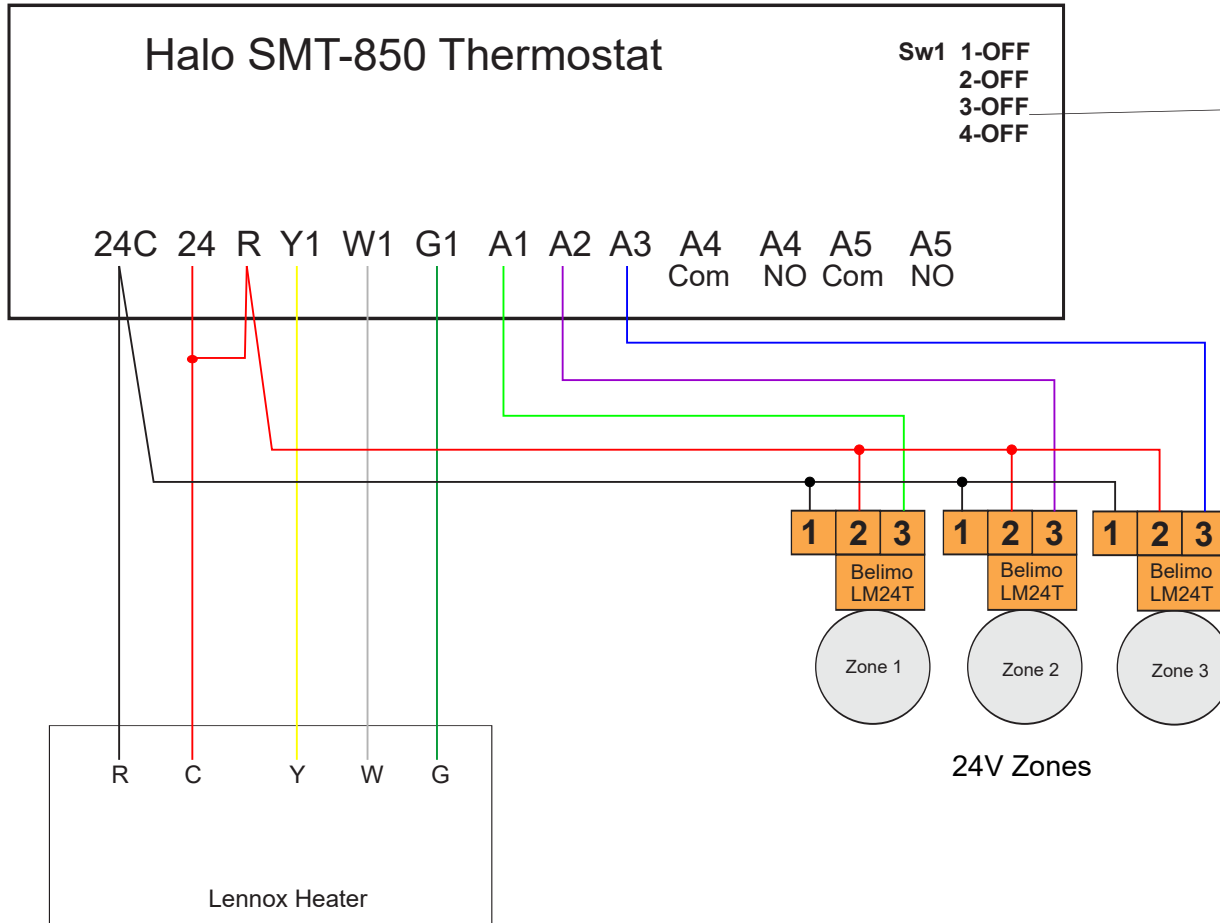

Security	Function
Equipment	Aux Rly 1 Z1 Damper
Fan Control	Aux Rly 2 Z2 Damper
User Display	Aux Rly 3 Z3 Damper
Control O/Ride	Aux Rly 4
I/O Options	Input 1
Advanced	Input 2
Expander	Input 3
Coms	Input 4
Save and Exit	0-10V 1
	0-10V 2
	0-10V 3

Installer Menu I/O Options - Default Pin is 0021

For 3 zones Set AUX1 to Z1 Damper, AUX 2 to Z2 Damper and AUX 3 to Z3 Damper

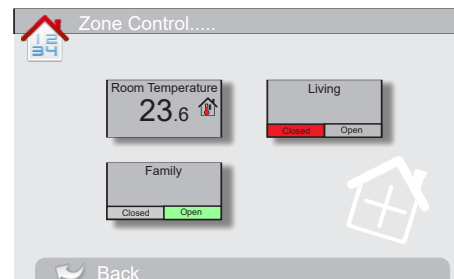

		Installation Drawing	
Drawing Revision History		Drawing Name Smart Temp Halo wired to a a Lennox Heater with 3 24V Zones (Belimo Actuators)	
10-07-2026		REV 1.0 By: John K	
Unit 20, 1488 Ferntree Gully Road Knoxfield Vic 3180		Ph: (03) 9763 0094 www.thermostat.com.au	