Smart Temp™ Australia

RS-1/02 Outdoor Sensor

UI1 0V

Sw1 1-OFF 2-ON 3-ON 4-OFF

Halo SMT-850 Thermostat

AO1 AO2 0V

24C 24 R Y1 W1 G1

Belimo LMU-24-SR

3 Y 2 G 1 G Spill

Actutator

3 Y 2 G 1 G Fresh


3 Y 2 G 1 G R/Air

24V Power Supply

ACC 24V STG1 HEAT FAN


APAC P030AHR9AE

Halo Terminals

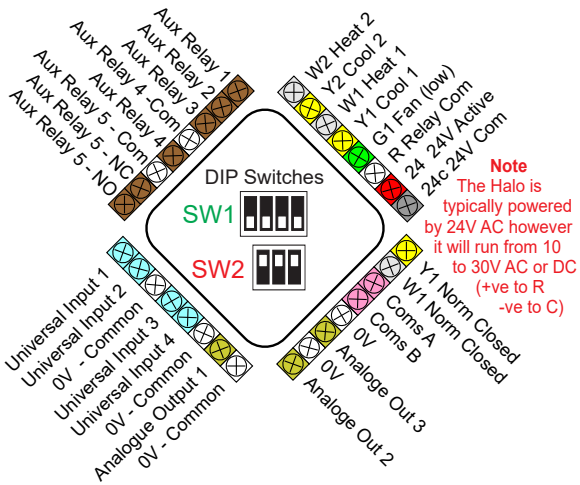

Note
The Halo is typically powered by 24V AC however it will run from 10 to 30V AC or DC (+ve to R -ve to C)

Halo Installer settings

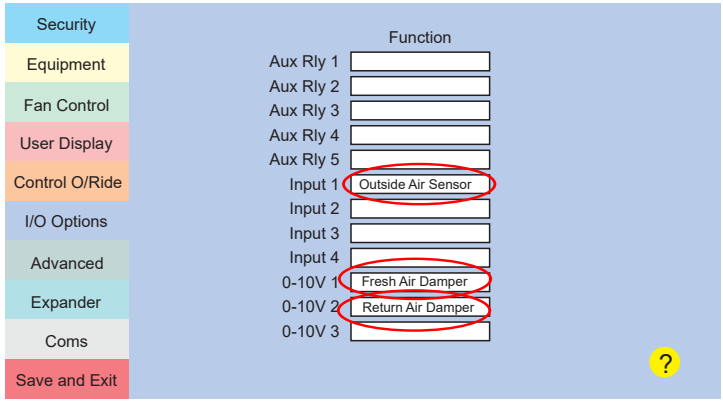

Installer Menu I/O Options - Default Pin is 0021

Installation Drawing

Drawing Revision History		
08-10-2026	REV 1.0	By: John K

Drawing Name: Smart Temp Halo -Apac AC with Economy Cycle 0-10V Dampers

All care has been taken in the preparation of this drawing however Smart Temp Australia accept no responsibility for damage that may be caused by using this information. This is a guide only.

Unit 20, 1488 Ferntree Gully Road Knoxfield Vic 3180 Ph:(03) 9763 0094 www.thermostat.com.au