


Smart Temp™ Australia

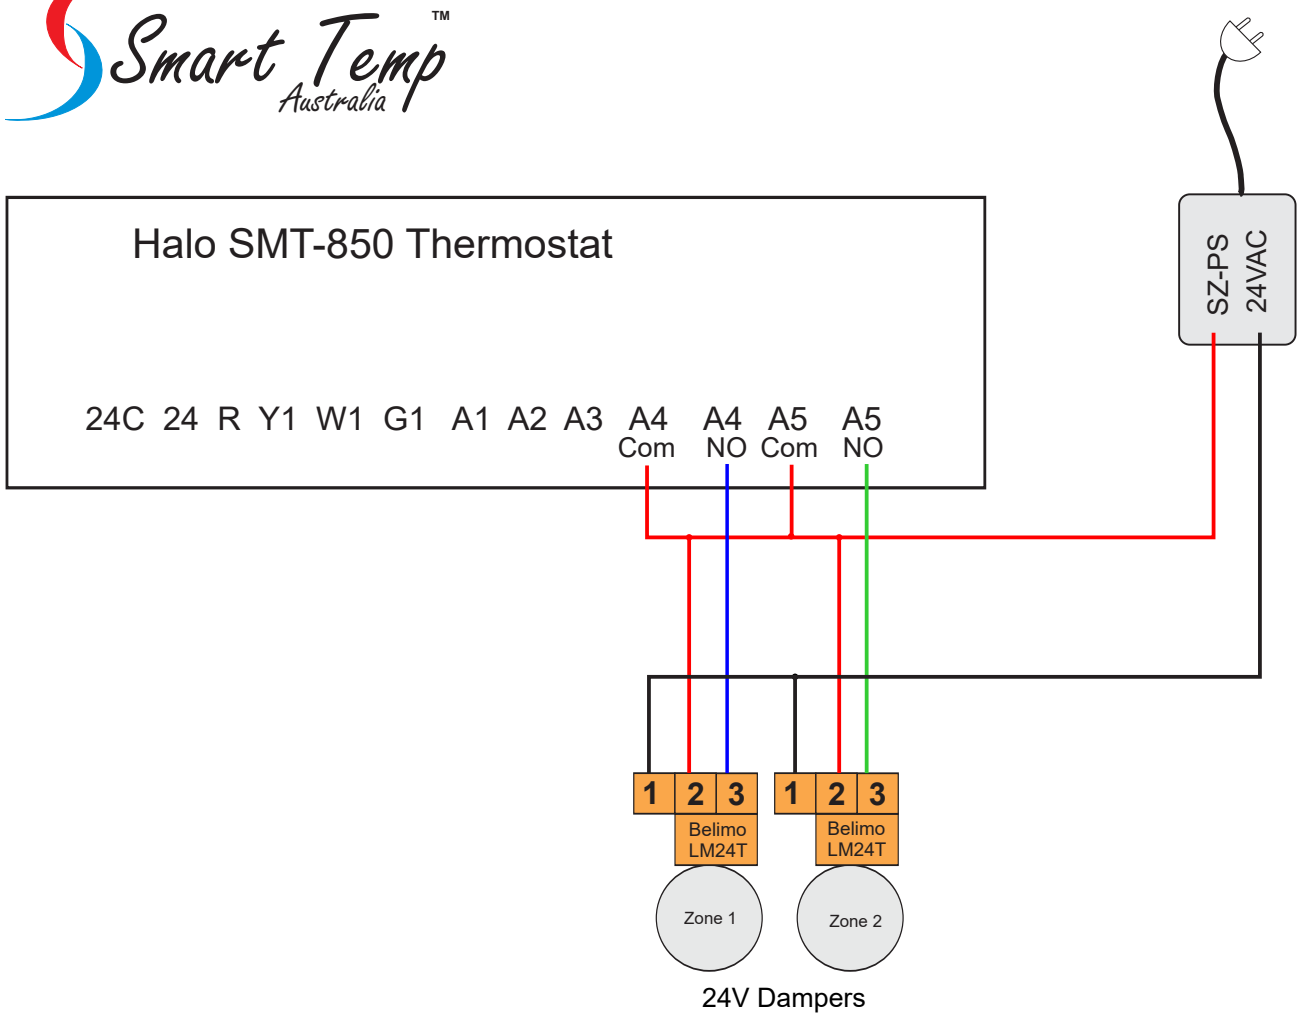

Halo Terminals

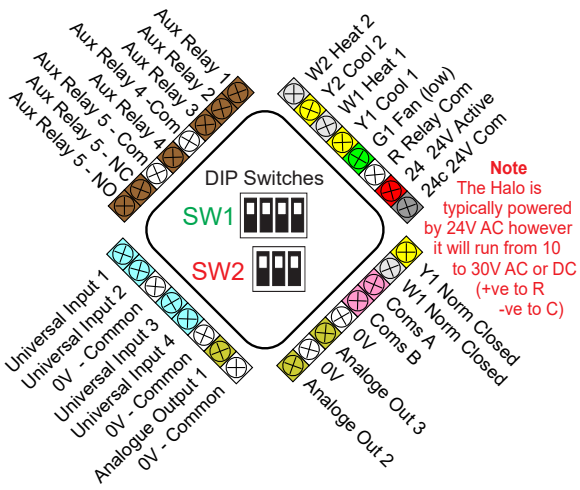

Note
The Halo is typically powered by 24V AC however it will run from 10 to 30V AC or DC (+ve to R -ve to C)

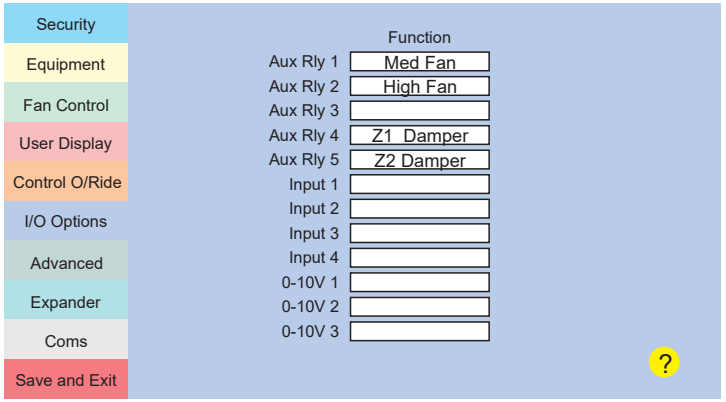

Installer Menu I/O Options - Default Pin is 0021

For 2 zones Set AUX4 to Z1 Damper and AUX 5 to Z2 Damper

Smart Temp™ Australia

Installation Drawing

Drawing Revision History		
05-10-2026	REV 1.0	By: John K

Drawing Name
SMT-850 Halo with two 24V Belimo Zone Dampers using Aux Relay 4 & 5 with SZ-PS power supply

All care has been taken in the preparation of this drawing however Smart Temp Australia accept no responsibility for damage that may be caused by using this information. This is a guide only.

Unit 20, 1488 Ferntree Gully Road Knoxfield Vic 3180 Ph:(03) 9763 0094 www.thermostat.com.au