Smart Temp™ Australia

SMT-400 THERMOSTAT

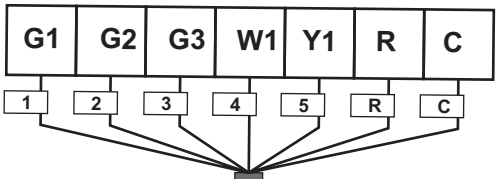

SMT-400
Switch Settings
1 = on
2 = on
3 = off
4 = on
5 = off
6 = n/a
7 = off
8 = off

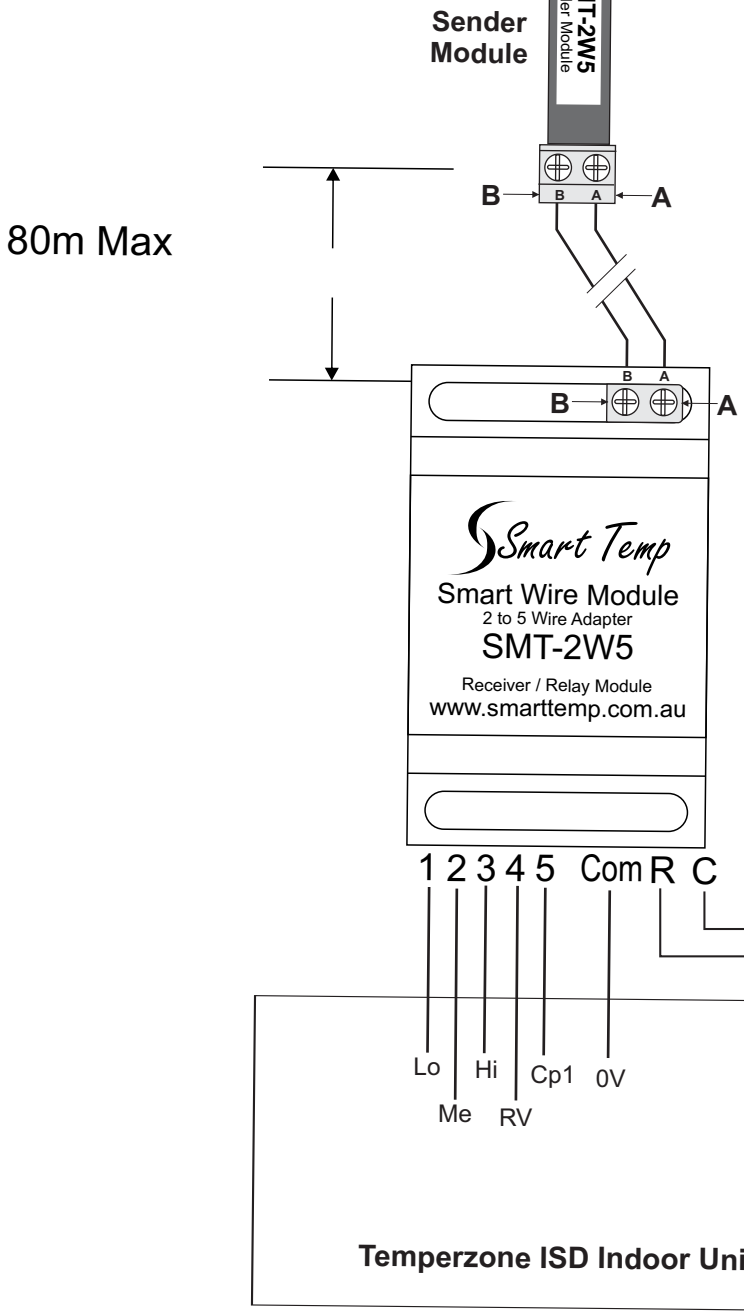

Sender module Typical Colour Codes

Mark	Colour	Typical Function
1	Green	G - Fan
2	Yellow	Y1 - 1st Stage Cool
3	White	W1 - 1st Stage Heat or Reversing Valve
4	Purple	Y2 - 2nd Stage Cool
5	Brown	W2 - 2nd Stage Heat or Aux / Emergency Heat
24R	Red	24 VOLT (HOT)
24C	Black	24 VOLT (COMMON)

ALL CARE AND DILIGENCE HAS BEEN TAKEN IN THE PREPARATION OF THIS INTERFACE DIAGRAM. ***SMART TEMP AUSTRALIA PTY LTD*** WILL ONLY BE RESPONSIBLE FOR DAMAGE CAUSED TO THE SMART TEMP PRODUCT, AND ONLY IF IT HAD BEEN CORRECTLY APPLIED IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS.
IT IS THE DEALER / CONTRACTORS SOLE RESPONSIBLITY TO ENSURE CORRECT OPERATION OF THE MAJOR EQUIPMENT IS MAINTAINED.

Smart Temp™ Australia

Installation Drawing

Drawing Revision History		
17-11-20	REV 1.0	By: John K

Drawing Name

SMT-400 with SMT-2W5
Temperozne Uc8 ISD Indoor Unit

All care has been taken in the preparation of this drawing however Smart Temp Australia accept no responsibility for damage that may be caused by using this information. This is a guide only.

Unit 20, 1488 Ferntree Gully Road Knoxfield Vic 3180
Ph:(03) 9763 0094
Fax (03) 9763 0098
www.thermostat.com.au