Smart Temp™ Australia

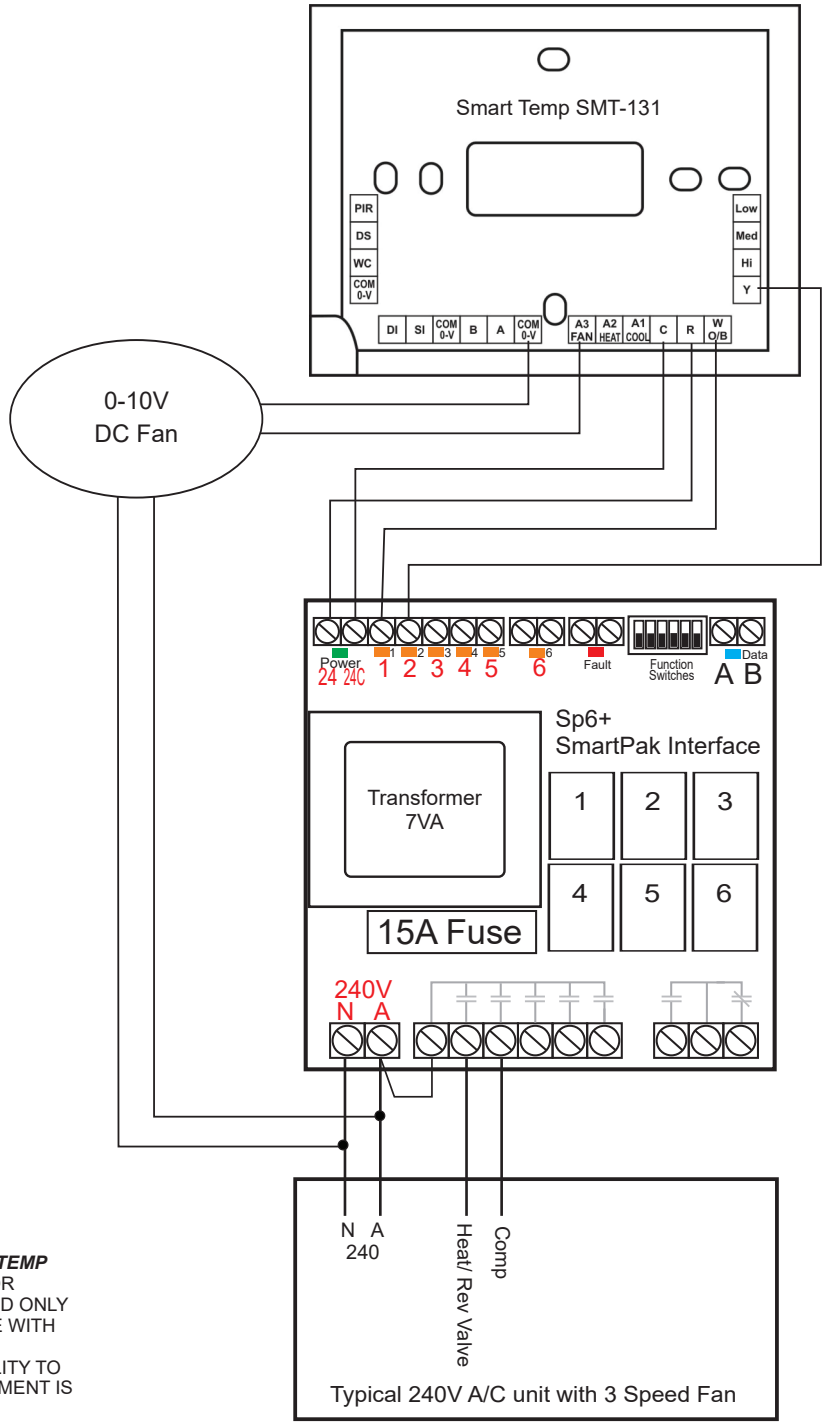

Smart Temp SMT-131



SW 1= ON - 3 Fan speeds
SW 2 = Based on System
SW 3 = Based on System
SW 4 = Based on System
SW 5 = Based on System
SW 6 = OFF
SW 7 = Based on Project requirements
SW 8 = OFF

Switch	Function	On	Off
Sw1	Indoor Fan Mode	3 Fan Speed	1 Fan Speed
Sw2	Equipment Type	Heat Pump	Heat Cool
Sw3	HP Mode (Sw2= ON) HC Mode (Sw2=OFF)	Rev Valve Heat (B) HE – Fan With Heat	Rev Valve Cool (O) HG – No Fan In Heat
Sw4	2 / 4 pipe mode	2 pipe mode	4 pipe Mode
Sw5	Comp Protection Delay	5 Min Anti Cycle	Immediate Comp start
Sw6	Klixon Mode	On	Off
Sw7	Ventilation Mode	Permitted	Not Permitted
Sw8	Door Station (Optional)	Fitted	Door Station Not Used

ALL CARE AND DILIGENCE HAS BEEN TAKEN IN THE PREPARATION OF THIS INTERFACE DIAGRAM. ***SMART TEMP AUSTRALIA PTY LTD*** WILL ONLY BE RESPONSIBLE FOR DAMAGE CAUSED TO THE SMART TEMP PRODUCT, AND ONLY IF IT HAD BEEN CORRECTLY APPLIED IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS.
IT IS THE DEALER / CONTRACTORS SOLE RESPONSIBLITY TO ENSURE CORRECT OPERATION OF THE MAJOR EQUIPMENT IS MAINTAINED.

Smart Temp™ Australia

Installation Drawing

Drawing Revision History

26-11-2024	REV 1.0	By: John K

Drawing Name
SMT-131 3 fan speed wired to Smart Pak6+ / Typical 240V A/C Unit

All care has been taken in the preparation of this drawing however Smart Temp Australia accept no responsibility for damage that may be caused by using this information. This is a guide only.

Unit 20, 1488 Ferntree Gully Road Knoxfield Vic 3180
Ph:(03) 9763 0094 www.thermostat.com.au